

High Power Output
Low LCOE


Maximum Power
630W+

TWMNH

N-type Half-cell
Bifacial Module (66)


66HD610-630W

<https://en.tongwei.cn/>



Learn More

DRAWINGS (Unit: mm)

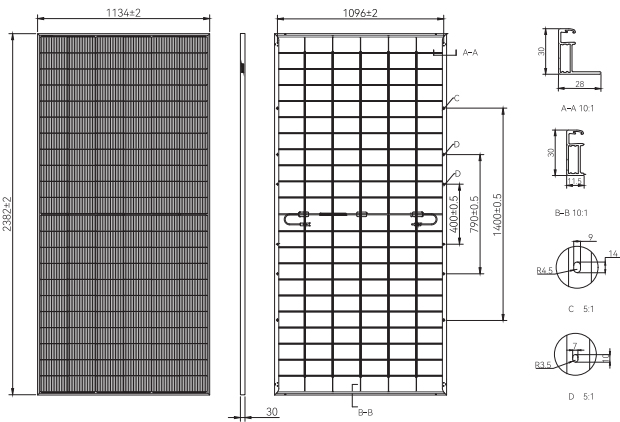

Mechanical Parameters

Cells	TNC (N Type Monocrystalline Cell)
Cell Orientation	132[6×22]
Dimension	2382±2×1134±2×30mm
Weight	32.5kg
Front Glass	2.0mm AR coated heat strengthened glass
Rear Glass	2.0mm heat strengthened glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Output Cable	4.0mm ²
Cable Length	+400mm, -200mm or ±1400mm, length can be customized
Wind/Snow Load	2400Pa/5400Pa
Packaging	36pcs per pallet, 720pcs per 40'HC

Electrical Characteristics (STC)

Module Type: TWMNH-66HDXXX

Maximum Power: Pmax [W]	610	615	620	625	630
Open Circuit Voltage: Voc [V]	48.70	48.90	49.10	49.30	49.50
Short Circuit Current: Isc [A]	15.94	16.00	16.06	16.12	16.18
Voltage at Maximum Power: Vmp [V]	40.48	40.65	40.82	40.96	41.10
Current at Maximum Power: Imp [A]	15.07	15.13	15.19	15.26	15.33
Module Efficiency: η [%]	22.6	22.8	23.0	23.1	23.3

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass1.5

Electrical Characteristics (NMOT)

Maximum Power: Pmax [W]	461	464	468	472	476
Open Circuit Voltage: Voc [V]	46.36	46.55	46.74	46.93	47.12
Short Circuit Current: Isc [A]	12.87	12.92	12.97	13.01	13.06
Voltage at Maximum Power: Vmp [V]	37.89	37.98	38.18	38.32	38.45
Current at Maximum Power: Imp [A]	12.17	12.22	12.26	12.32	12.38

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed m/s

Electrical characteristics with different rear side power gain

5%	Maximum Power: Pmax [W]	640	645	651	656	661
	Module Efficiency: η [%]	23.7	23.9	24.1	24.3	24.5
15%	Maximum Power: Pmax [W]	701	707	713	718	724
	Module Efficiency: η [%]	26.0	26.2	26.4	26.6	26.8
25%	Maximum Power: Pmax [W]	762	768	775	781	787
	Module Efficiency: η [%]	28.2	28.4	28.7	28.9	29.1


Temperature Rating

Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.046%/°C
NMOT	45±2°C


Operating Parameters

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+3%
Bifaciality	80±5%

WARRANTY

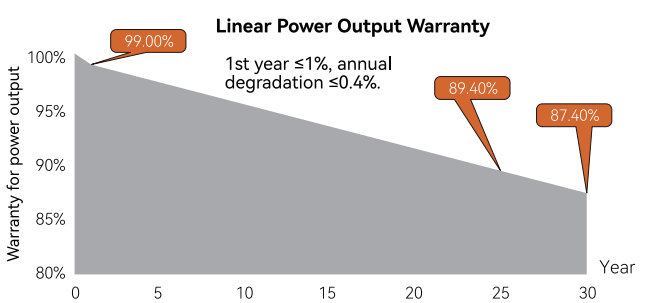

I-V Curve

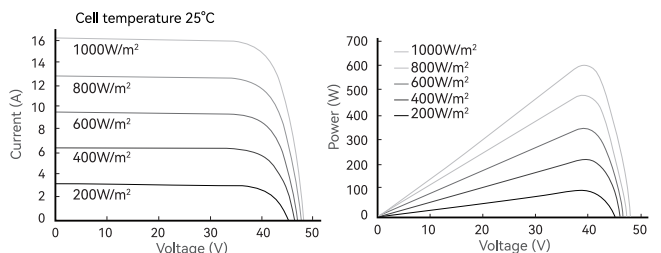

Certifications

Quality Management System and Product Certification

- ISO 9001: 2015/Quality management system
- ISO 14001: 2015/Environmental management system
- ISO 45001: 2018/Occupation health safety management system
- ISO 50001: 2018/Energy management system
- IEC 62941: 2019/Quality system for PV module manufacturing
- IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt), IEC 62716 (Ammonia), IEC 60068-2-68(Sand)



Email: sales@tongwei.com Website: https://en.tongwei.cn/ Add: No.588, Middle Section Tianfu Avenue, High-Tech Zone, Chengdu, China (Sichuan) Pilot Free Trade Zone Tel: +86-028-60707985

Statement: With technological process and product update, there maybe deviation between the technical parameters of Tongwei's module products and the technical parameters contained in the specification, and Tongwei Solar has the right to adjust the technical parameters at any time without notifying the customer, the final interpretation of the technical specification is vested in Tongwei Solar. (20250206)